

<b>LINE:</b>	<b>DELI SLICERS</b>
--------------	---------------------

<b>MODEL:</b>	<b>RB-250 &amp; RB-300</b>
---------------	----------------------------



USE	CAPACITY AND DIMENSIONS				
	MODEL	Motor	Maximum cut Width	Blade Diameter	Maximum sliding table travel
* Deli * Restaurants * Food service * etc	RB-250	1/3 HP/0.25 kw	0 to 12 mm 0 to 0.47" IN	250 mm 9.8" IN	25.5 cm 10" IN
	RB-300	1/3 HP/0.25 kw	0 to 12 mm 0 to 0.47" IN	300 mm 11.8" IN	25.5 cm 10" IN

### BENEFITS

- Light duty deli slicers
- Belt transmission
- Integrated knife sharpener

**LINE:** CHEESE AND DELI SLICERS

**MODEL:** RB-250 & RB-300

**BENEFITS**



**SAVES TIME AND MONEY**

Many parts in these slicers are easily disassembled with no tools, reducing the time spent on cleaning and maintenance cost.



**HYGIENIC**

Ball burnished aluminum frame and stainless steel construction, very resistant, hygienic, easy to clean.




**LONG LIFE WITH MINIMUM MAINTENANCE**

The potent motor and dependable belt transmission allows the RB-250 and RB-300 to produce fast and precise slices.

**SPECIFICATIONS**

MODEL	RB-250	RB-300
Motor	1/3 HP/0.25 kw	1/3 HP/0.25 kw
Volts	127/220 volts	127/220 volts
Hz	50/60	50/60
Blade diameter	250 mm/ 9.8" IN	300 mm/ 11.8" IN
Speed blade	430 RPM	430 RPM
Maximum cut width	0 to 12 mm/0 to 0.47" IN	0 to 12 mm/0 to 0.47" IN
Maximum sliding table travel	25.5 cm/10" IN	25.5 cm/10" IN
Net weight	20 kg/44 lb	22 kg/48.5 lb
Shipping Weight	25 kg/55 lb	27 kg/59.5 lb

**GRAVITY FEED**



45° Slant for true gravity feed allows free fall product feeding



**INTEGRATED KNIFE SHARPENER**

It is very easy to use and keeps a perfect cutting edge, sharpening and honing the blade through its spinning stones



**SAFETY OPERATION**


The blade has a metallic cover with a side protector to avoid accidents during cleaning and operation. It also has a lighted switch that indicates when the motor is on.




**CONSISTENCY IN CUTS**

Graduated thickness gauge (0 to 14 mm / 0 to .47" ) to adjust thickness slices


**DIMENSIONS**

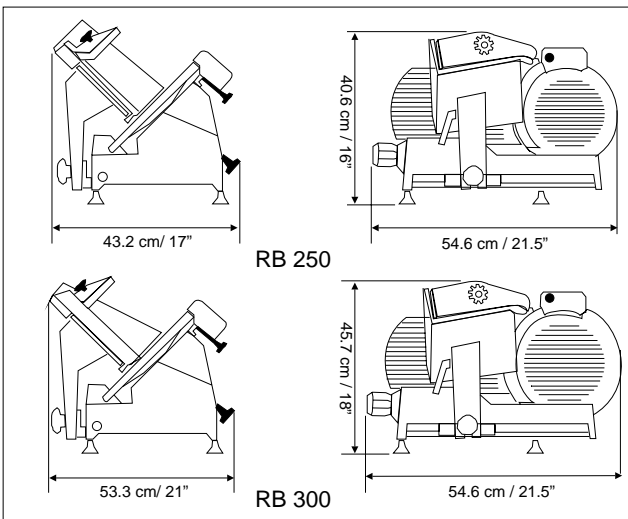

**MAXIMUM SLICING SIZE**



RB-250 218 x 135 mm  
8.6" x 5.31" IN  
RB-300 230 x 155 mm  
9" x 6.1" IN



RB-250 165 mm ø  
6.5" IN ø  
RB-300 200 mm ø  
7.9" IN ø



Safety & Sanitation  
Conforms UL std 763

Conforms NSF-8

Conforms CAN/CSA STD C22.2

DISTRIBUTED BY

