




Stainless Steel Solid Refrigerator

RS40-UL


- Featuring a Smart Bluetooth Temperature Control optimizing and reducing energy consumption.
 - Keep in control all of your refrigerators at the same time.
 - Get graphic temperature behavior.
 - Easily access operation history and e-mail it.
- Includes 8 shelves and offers 10 levels of stock.
- Includes 2 baskets on each door.
- Stainless Steel Cabinet construction interior and exterior.
- Solid doors and cabinet injected with high density polyurethane that isolate the intense heat of your kitchen
- Liquid evaporating tray.
- Heavy Duty Casters.



Smart Bluetooth Temperature Control.
Maximizes the efficiency of your product.

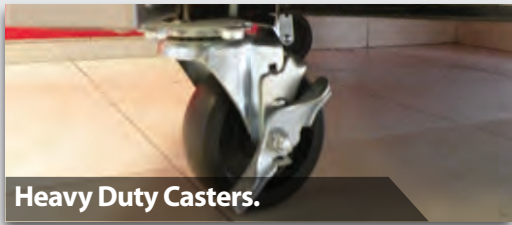


Heavy Duty Casters.

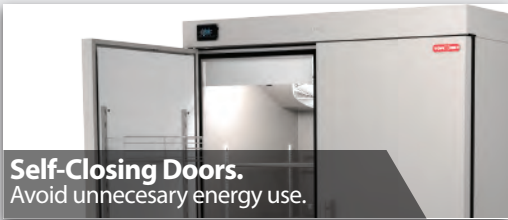

Self-Closing Doors.
Avoid unnecessary energy use.



Large Capacity.
For 45 x 65cm trays.

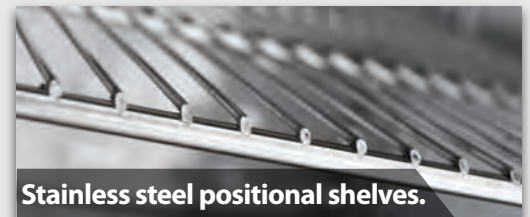

Stainless steel positional shelves.

RS40-UL Refrigerator Technical Specifications

Capacity (ft³): 40

Capacity (lt): 1133

Weight (Lb) 424.17

Shelves quantity: 8

Shelves dimension: 53 x 55cm (20.8 x 21.6in)

Refrigerant: R134a

Evaporation Temperature: -6.7°C (20°F)

Condensation Temperature: 43°C (109.4°F)

Optimal Temperature Range: 0° a 4°C (32°F a 40°F)

Nominal Voltage: [V] 127

Plug type: NEMA-5-15P ⓘ

Electric cable length: 1.90 m (74in)

Nominal Current: [A] 9.20

Frequency: [Hz] 60

Method of Lighting: Fluorescent

Compressor (HP): 1/2

Condenser: Forced Ventilation

Evaporator: Forced Ventilation

Expansion Method: Capillary

PROFESSIONAL LINE



Smart Bluetooth
Temperature Control

Two self-closing stainless steel doors

Eight stainless steel positionable shelves

Four positionable stainless steel
baskets (two on each door)

Stainless steel cabinet construction
interior and exterior injected with high
density polyurethane.

Liquid evaporating tray

Heavy Duty Casters

DISTRIBUTED BY:

Also available 220V / 50Hz
One year warranty (12 months) on
parts and manufacturing defects.
Design and specifications subject to
change without notice.

