




# Under Bar Table

- Electromechanical control temperature.
- Stainless steel preparing cold table.
- Towel handle on the front.
- Lower storage with a positional shelf.
- Walls injected with high density polyuretane and stainless steel exterior finish.
- Heavy duty wheels.
- Stainless steel storage floor.
- Liquid evaporating tray.

**UBT01**



**Positional shelf.**  
For a better storage capacity.

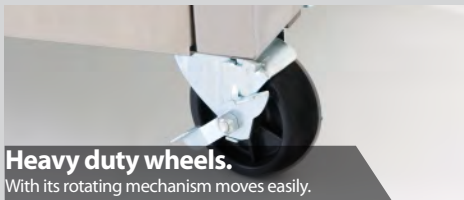

**Heavy duty wheels.**  
With its rotating mechanism moves easily.



**Forced air cooling.**  
The temperature range is adjusted from 32° to 41°F.



**Stainless steel floor.**  
Easy to clean, hygienic and more resistant.

# Under Bar Table UBT01 Technical Specifications

## UNDER BART TABLE



Capacity (ft<sup>3</sup>): 10.1 ft<sup>3</sup>

Capacity (Lt): 286 L

Weight (Kg/Lb): 101.2Kg / 223Lb

Shelves quantity: 1 (stock)

Refrigerant type: R134a

Evaporization temperature: -6.7°C / 19.4°F

Defrost Method: N/A

Optimal Temperature Range: 0° to 5°C/33.8° to 41°F

Nominal Voltage: [V] 127

Plug type: NEMA-5-15P 

Electrical cable length: 1.9mts (6ft)

Nominal current: [A] 6.5

Frecuency: [Hz] 60

Lighting type: Fluorescent lamp

Compressor (HP): 1/5

Condensator: Forced Ventilation

Evaporator: Forced Ventilation




Expansion Method: Capillary tube

High resistance door injected with high density polyurethane.

Stainless steel cold work-table.

Towel handle on the front.

Stainless steel exterior finish.

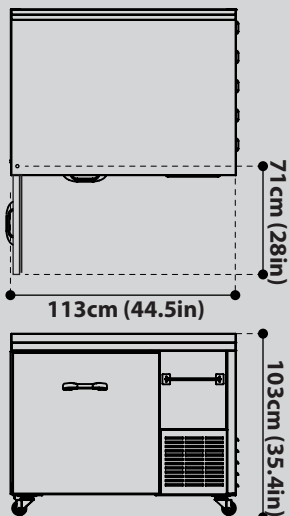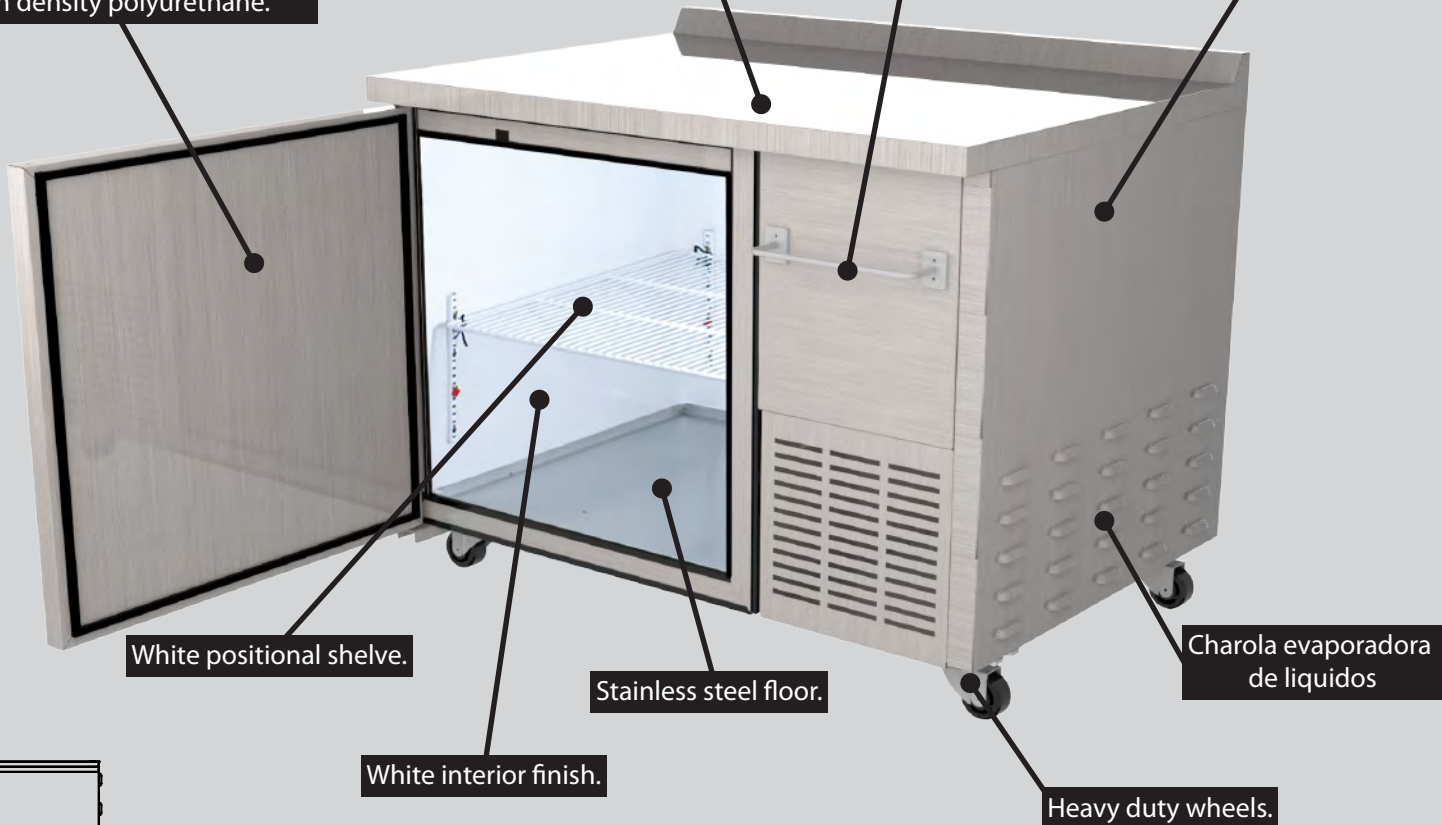

Also available 220V/50Hz  
One year warranty (12 months)  
on parts and manufacturing  
defects. Design and specifications  
subject to change without notice.

### DISTRIBUTED BY:

